UltraLights

Clarus 14320

project name:	
project location:	
specifier name:	
specifier location:	
quantity:	
fixture type:	

modifications:

Base Specs

24"h x 24"w x 48-96"OAH
Cable Hung

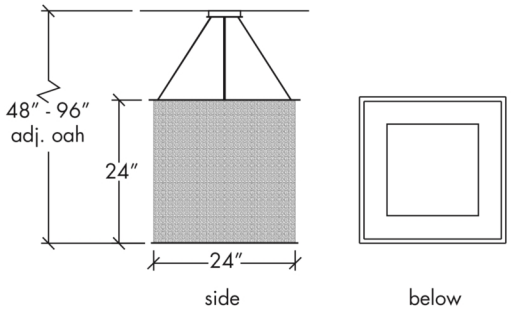

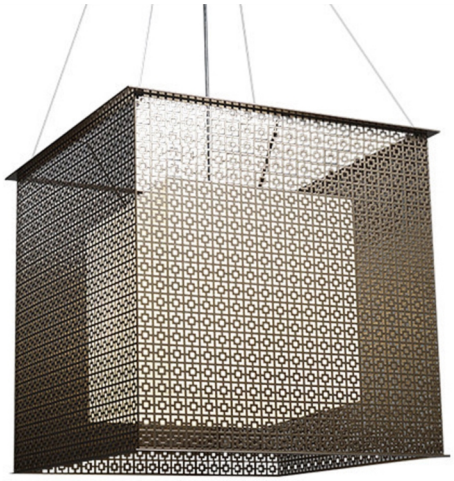

© 2021 UltraLights Lighting

UltraLights

Clarus 14320

pattern:

A1 - Angles CL - Cloverleaf RD - Round SQ - Squares

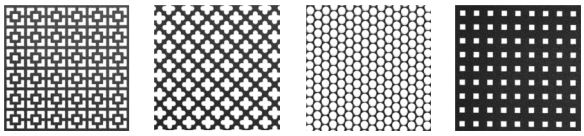

standard finish:

BA - Bronze Age
BK - Black
BP - Black Pearl
CB - Cast Bronze
CH - Chestnut
CR - Chrome
DI - Dark Iron
EB - Empire Bronze
MB - Medieval Bronze
NB - New Brass
SB - Smokey Brass
SP - Satin Pewter
SS - Smoked Silver

standard diffuser:

OA - Opal Acrylic

lamping:

03: Incandescent, 4 x E26 - 60W max ea, A-Type, 120V, Standard Phase Dimming, UL/cUL Dry/Damp

04: 49.6w Integrated LED, 7787 Initial Lumens, 3000K, 90 CRI, 120V-277V, 0-10V Dimming, UL/cUL Dry/Damp (Powered hanging cables - NO BLACK POWER CORD)

10: Wattage Restriction Label - 4 x E26 for LED Retrofit 20W max ea - A-Type, 120V, Standard Phase Dimming, UL/cUL Dry/Damp

14: 33.6w Integrated LED, 4724 Initial Lumens, 3000K, 90 CRI, 120V, Standard Phase Dimming, UL/cUL Dry/Damp

mounting:

Stem Mount — Specify OAH - **±$ Inquire**
Semi-Flush Mount - **±$ Inquire**
Sloped Ceiling Adaptable - **±$ Inquire**

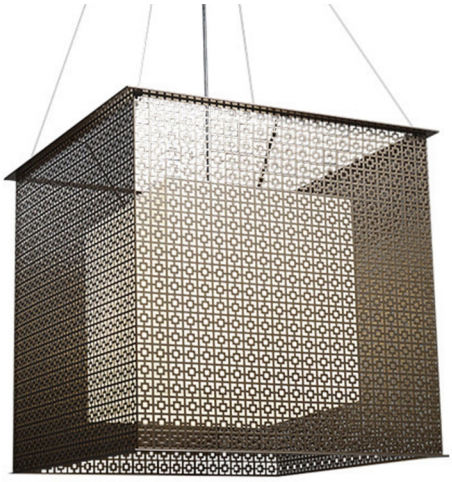

© 2021 UltraLights Lighting